


CF002a

under framed suspended floor Dow Tuff-R

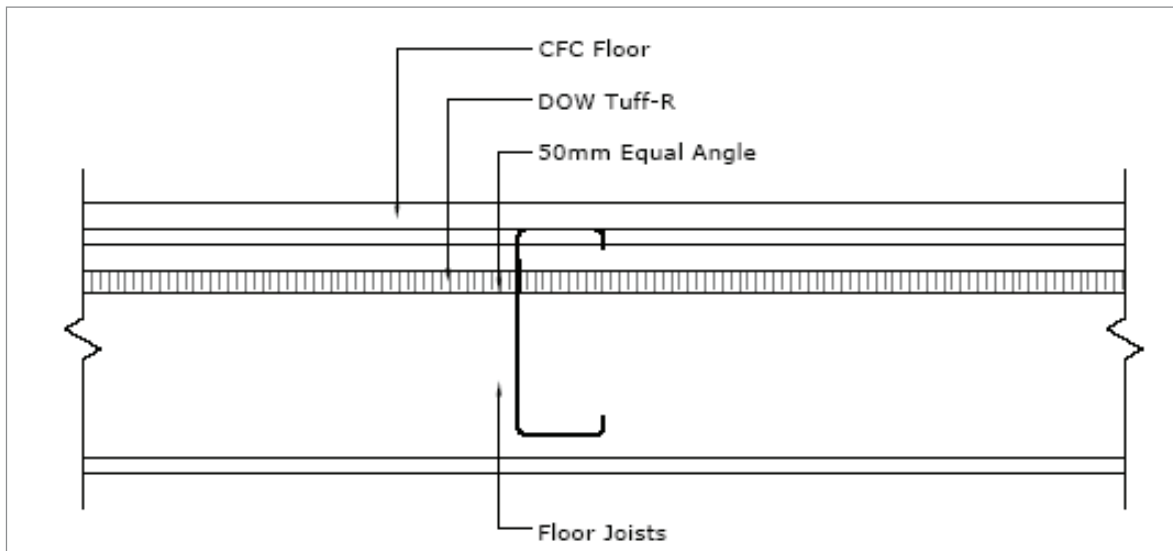

Preparation:	Ensure retaining clip or angle is secure.
Installation:	Lay insulation boards between floor joists.
Insulation:	Dow Tuff-R
Total R-Value:	[Complete]
Final finish:	[Complete]

[Size] – Determined by required material R-value and k-value.
 32mm Board will give R1.5 material /product only R-Value.