




soffit under open suspended concrete slab

Dow Tuff-R or Dow Thermax LD

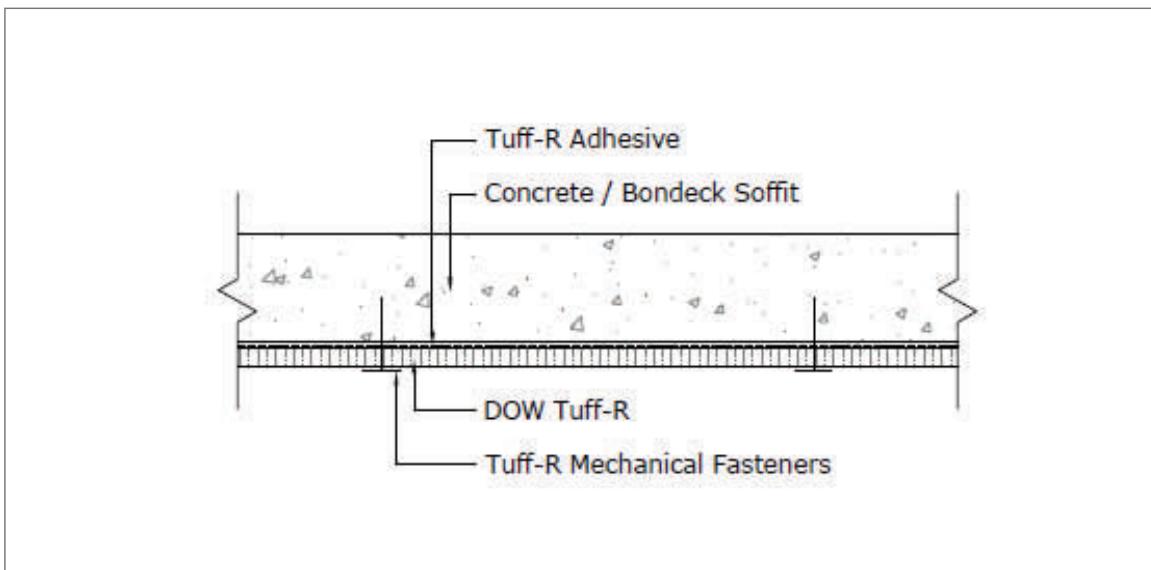

Location: Underside of concrete slab and beams. (White/foil facing down).

Material Insulation: Dow Tuff-R or Dow Thermax LD.

Total R-Value: [Complete]

Installation Method
Surface Preparation: All surfaces must be clean, sound and free of dust and contaminants.

Adhesive Apply Dow Tuff-R/Dow Thermax LD adhesive in daubs the size of a 10 cent coin on the surface of the insulation @ 300mm to 400mm centres. Press insulation board into position.

Mechanical Fixing Apply Dow Tuff-R/Dow Thermax mechanical Fixings (two per 2235 x 1200mm board). Apply 75mm wide reinforced foil tape to all joins. Where insulation board is exposed to the elements, then foil tape must secure the edge of insulation board.