


full cavity masonry wall Dow Tuff-R or Dow Thermax LD

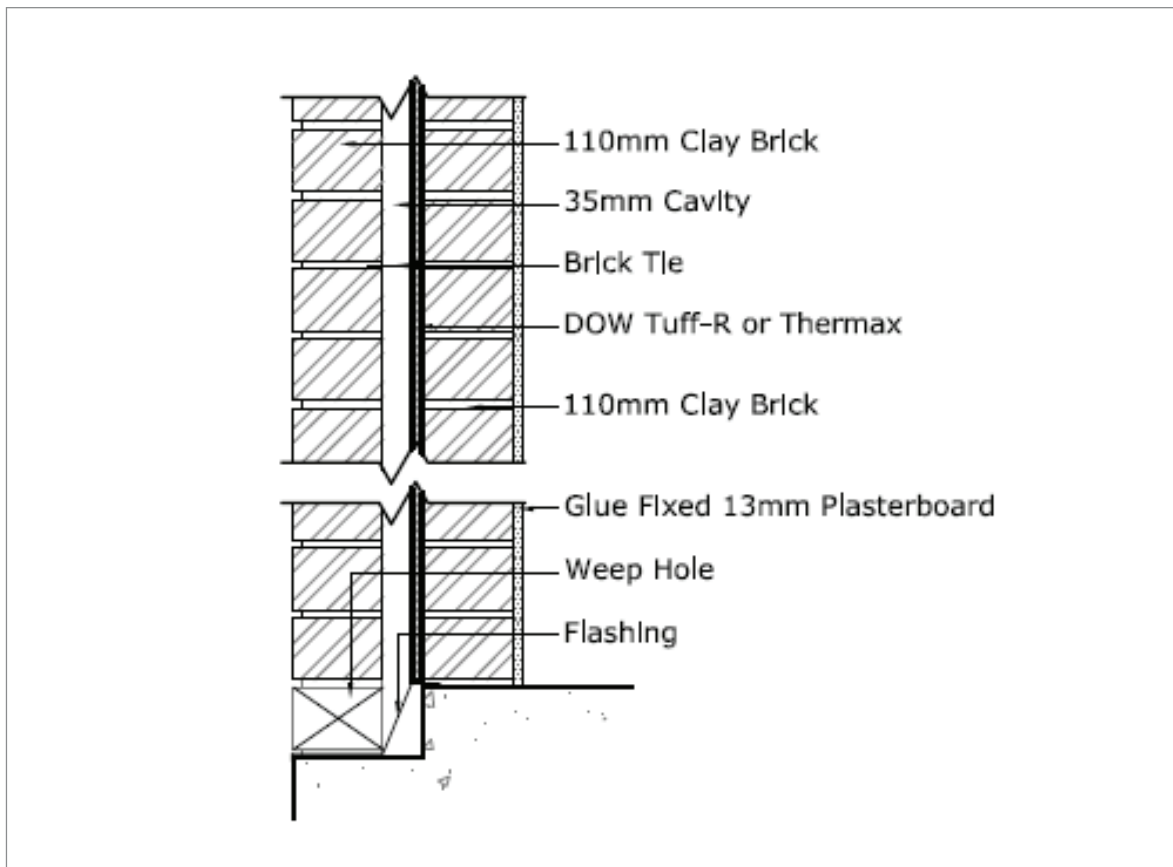

General

Location: To the inner masonry skin (cavity side).

Material

Insulation: Dow Tuff-R or Dow Thermax

Total R-Value: [Complete]

Fixing: Proprietary plastic clips on pre installed wall ties. Tape joints.

Installation: Fit to external face of internal skin. Keep boards clean and dry and free from mortar and grout. Do not bridge the cavity.

Flashings: Install flashings prior to installing insulation panels. Prevent entry of water behind the insulation boards.