



## Styrofoam HD-X


### Details

In cold stores the proper design of the floor system is critical to avoid the bending and cracking problems which can occur in inadequately designed low temperature floor systems. Floor designs must be able to withstand the high floor loadings present in low temperature facilities.

The typical low temperature floor design has not changed for many years. The insulation is laid in multiple layers on a vapour retarder either over a sub-slab or directly over the soil. Reinforcement and slip sheets are positioned where necessary and the concrete for the wearing slab is poured directly onto the insulation.

After the wearing slab has cured, it must be able to support the live and dead loads imposed by any moving equipment, storage racks and stored materials. As design loads increase, the insulation plays a more important role in providing support for the wearing slab.

Thanks to an extremely high compressive strength-to-weight ratio, exceptional moisture resistance, low thermal conductivity and long-term performance of Styrofoam™ HD-X extruded polystyrene (XPS) rigid thermal insulation distributed by DCTech, makes it the ideal solution for cold storefloor

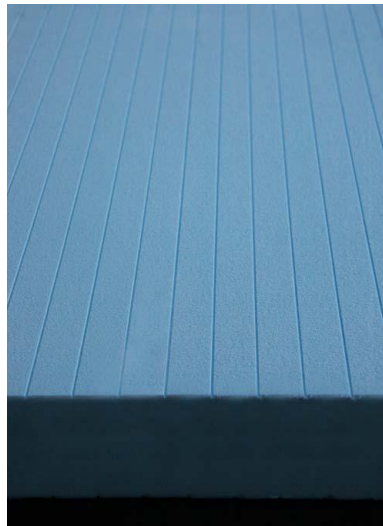

### Specification Clause

#### General Application Board

#### Specify Dow Styrofoam™ 'X' Foam for Greenstar projects

Dow Styrofoam™ HD-X extruded polystyrene general application board should be described in

Dynamic Composite Technologies Pty Ltd  
ABN 55 103 023 874

### NSW

Unit 8, 171-175 Newton Rd  
Wetherill Park NSW 2164  
P O Box 7186  
Wetherill Park DC NSW 1851  
T 02 8788 9555  
F 02 9604 7468  
E nsw@dctech.com.au

### VIC

12 Agosta Drive  
Laverton North VIC 3026  
T 03 9369 7920  
F 03 9369 4043  
E vic@dctech.com.au

[www.dctech.com.au](http://www.dctech.com.au)



applications.

When used in cold storefloor panels, Styrofoam™ HD-X XPS insulation will support heavy cargo loads and the dynamic loads of fork lift trucks. When used in walls it absorbs high dynamic loads, such as those caused by wind and vibration. When used in roof panels Styrofoam™ HD-X XPS insulation will support high tensile loads from suspended items.

The homogeneous closed-cell structure ensures that Styrofoam™ HD-X XPS rigid insulation retains its performance even when in permanent contact with moisture. This exceptionally stable material will retain its initial insulation performance and physical integrity in exposed conditions over the very long term. It is this unusual property that made possible the inverted warm roof concept, pioneered by Dow.

### Applications

- Cold store floors

### Features

- High compressive strength-to-weight ratio
- Low thermal conductivity
- Low susceptibility to rot, mould or fungal growth

### Standards

- Green Star Compliant
- CFC and HCFC Free
- Zero ODP

specifications as:-

The insulation shall be Dow Styrofoam™ HD-X \_\_\_mm closed cell rigid cellular extruded polystyrene (XPS) foam panel with minimum compressive strength 700 kPa. Dow Styrofoam™ HD-X is distributed by Dynamic Composite Technologies -  
T: 1800 051 100.

Dynamic Composite  
Technologies Pty Ltd  
ABN 55 103 023 874

### NSW

Unit 8, 171-175 Newton Rd  
Wetherill Park NSW 2164  
P O Box 7186  
Wetherill Park DC NSW 1851  
T 02 8788 9555  
F 02 9604 7468  
E nsw@dctech.com.au

### VIC

12 Agosta Drive  
Laverton North VIC 3026  
T 03 9369 7920  
F 03 9369 4043  
E vic@dctech.com.au

[www.dctech.com.au](http://www.dctech.com.au)



**Technical Data**

Product Name:	<b>Dow Styrofoam™ HD-X</b> Extruded polystyrene XPS rigid thermal insulation
Product Description:	Dow Styrofoam™ HD-X XPS is a heavy load-bearing rigid thermal insulation board which will support heavy cargo loads and fork lift trucks in cold store floors and in roof panels to support high tensile loads.
Surface finish:	Planned with grooves on one face
Product code:	HD-X
Colour:	Blue
Edge treatment:	Shiplap
Nominal Thickness:	100 mm
Width:	600 mm
Length:	2510 mm
Density:	45 kg/m <sup>3</sup>
Compressive strength:	700 kPa
Water absorption by submersion:	0,2% by Vol.
Blowing agent:	CFC and HCFC Free
Environmental characteristics:	Green Star compliant and Zero ODP

**NSW**

Unit 8, 171-175 Newton Rd  
Wetherill Park NSW 2164  
P O Box 7186  
Wetherill Park DC NSW 1851  
T 02 8788 9555  
F 02 9604 7468  
E nsw@dctech.com.au

**VIC**

12 Agosta Drive  
Laverton North VIC 3026  
T 03 9369 7920  
F 03 9369 4043  
E vic@dctech.com.au

[www.dctech.com.au](http://www.dctech.com.au)

**Nominal Thickness to R-Value**  
**Dow Styrofoam™ HD-X XPS @ 24°C**

Nominal Thickness mm	Lambda/K Value/Thermal Conductivity	R Value
25	0.0278	0.9



30	0.0278	1.1
40	0.0278	1.4
50	0.0278	1.8
60	0.0278	2.2
75	0.0278	2.7
80	0.0278	2.9
90	0.0278	3.2
100	0.0278	3.6

™ Trademark of The Dow Chemical Company

Dynamic Composite  
Technologies Pty Ltd  
ABN 55 103 023 874

**NSW**

Unit 8, 171-175 Newton Rd  
Wetherill Park NSW 2164  
P O Box 7186  
Wetherill Park DC NSW 1851  
T 02 8788 9555  
F 02 9604 7468  
E nsw@dctech.com.au

**VIC**

12 Agosta Drive  
Laverton North VIC 3026  
T 03 9369 7920  
F 03 9369 4043  
E vic@dctech.com.au

[www.dctech.com.au](http://www.dctech.com.au)